


## <u>FITTING INSTRUCTIONS FOR TH0005</u> <u>TIE-DOWN HOOKS FOR DUCATI MONSTER 1200R 2016-</u>



## THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED BELOW. DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

Please note that the way the kit is packed does not necessarily represent the way of mounting to the bike.

THE PARTS SHOWN MAY BE REPRESENTATIVE ONLY (FOR CLARITY OF INSTRUCTIONS ONLY).

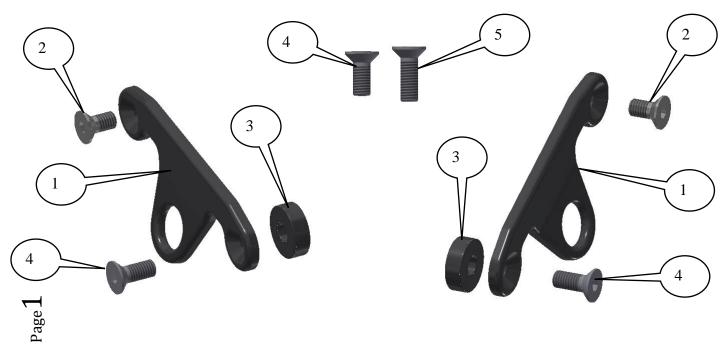

R&G Racing Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 <u>www.rg-racing.com</u> Email: <u>info@rg-racing.com</u>



## **LEGEND**

ITEM 1 = TIE-DOWN HOOK (SMW0063) (x2).ITEM 2 = M8 x 15mm LONG COUNTERSUNK BOLTS (x2).ITEM 3 = SPACERS (S0944 - 8mm WIDE) (x2).ITEM 4 = M8 x 20mm LONG COUNTERSUNK BOLTS (x3).ITEM 5 = M8 x 25mm LONG COUNTERSUNK BOLTS (x1).

Page | 2

Please note that in cases where kits are packed with rubber washers holding the components onto the bolt - the rubber washers should be thrown away!

### **TOOLS REQUIRED**

• Set of metric Allen keys to include 5 & 6mm A/F sizes.

### **GENERAL TORQUE SETTINGS**

 $\begin{array}{l} M4 \; BOLT = 8Nm \\ M5 \; BOLT = 12Nm \\ M6 \; BOLT = 15Nm \\ M8 \; BOLT = 20Nm \\ M10 \; BOLT = 40Nm \end{array}$ 


## FITTING INSTRUCTIONS

- Remove the OEM pillion footrests on both sides of the bike.
- Place one of the M8x20mm long countersunk bolts (item 4) through the rear hole in the transport hook (item 1), then place the spacer (item 3) over the bolt so it sits between the transport hook and the frame.
- Place one of the shorter countersunk bolts (item 2) through the front hole in the transport hook.
- Offer the R&G tie-down hook into position and tighten into the thread on the subframe, as shown above.
- Repeat for the opposite side.
- Please note this product can be used on the right hand side in conjunction with R&G exhaust hanger (product code EH0068) fitted, using the two longer bolts supplied (items 4 and 5) as shown below.



• Please ensure that when strapping the motorcycle down the ratchet straps do not come into contact with any part of the motorcycle, as the strap is likely to rub during transit and may cause damage.

ISSUE 2 20/12/2016 (NSY)



Page 2

R&G Racing

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 <u>www.rg-racing.com</u> Email: <u>info@rg-racing.com</u>



#### CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

#### **R&G RACING RETURNS POLICY (NON-FAULTY GOODS)**

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



Page | 3




## NOTICE DE MONTAGE TH0005 ATTACHES DE TRANSPORT POUR DUCATI MONSTER 1200R 2016-



Le kit contient les articles exposés ci-dessous, vérifier que toutes les pièces soient présentes avant de procéder au montage.

La façon dont le kit est emballé ne correspond pas forcément à la façon de monter les pièces sur la <u>moto.</u>

<u>LES PARTIES PRESENTEES PEUVENT ETRE UNIQUEMENT REPRESENTATIVES (POUR</u> <u>LA CLARTE DES INSTRUCTIONS UNIQUEMENT</u>.

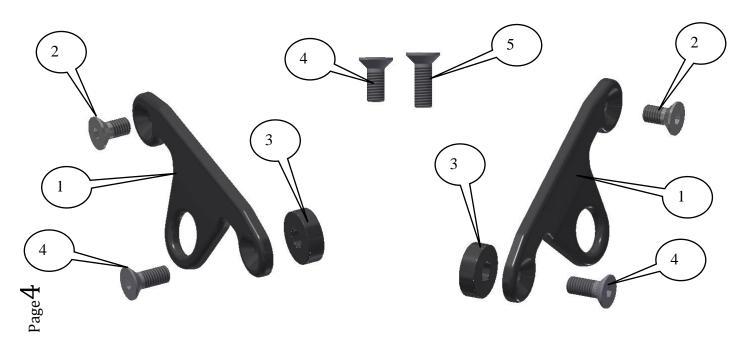

R&G Racing Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 <u>www.rg-racing.com</u> Email: <u>info@rg-racing.com</u>



## **LEGENDE**

Page | 5

Page

ARTICLE 1 = ATTACHES DE TRANSPORT (SMW0063) (x2).ARTICLE 2 = M8 x 15mm BOULONS A TETE PLATE (x2).ARTICLE 3 = ENTRETOISES (S0944 – 8mm de large) (x2).ARTICLE 4 = M8 x 20mm BOULONS A TETE PLATE (x3).ARTICLE 5 = M8 x 25mm BOULONS A TETE PLATE (x1).

Notez que si les kits sont emballés avec des rondelles en caoutchouc servant à tenir les composants, ces rondelles doivent être jetées!

## **OUTILS REQUIS**

• Clés Allen 5 & 6mm.

## COUPLES DE SERRAGE RECOMMANDÉS

M4 BOULON = 8Nm M5 BOULON = 12Nm M6 BOULON = 15Nm M8 BOULON = 20Nm M10 BOULON = 40Nm

# NOTICE DE MONTAGE

- Enlever les repose pieds d'origine des 2 cotés de la moto.
- Placer un boulon à tête plate M8x20mm (article 4) dans le trou arrière de l'attache de transport (article 1), puis placer l'entretoise (article 3) sur le boulon de façon à ce qu'elle se place entre l'attache de transport et le cadre.
- Placer un boulon à tête plate (article 2) dans le trou avant de l'attache de transport.
- Monter l'attache de transport R&G en position puis serrer dans le trou du sous-cadre, voir ci-dessus.
- Répéter du coté opposé.
- Notez que ce produit peut être utilisé du coté droit en jonction avec le support d'échappement R&G (code produit EH0068) monté, en utilisant les 2 boulons fournis (article 4 et 5), voir ci-dessous.



• Veiller à ce que lorsque vous sanglez la moto, le cliquet ne puisse pas toucher quelconque partie de la moto.

ISSUE 2 20/12/2016 (NSY)

R&G Racing Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 <u>www.rg-racing.com</u> Email: <u>info@rg-racing.com</u>



#### Notice de montage disponible sur www.rg-racing.com

#### CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

#### **R&G RACING RETURNS POLICY (NON-FAULTY GOODS)**

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



Page | 6